

**SPECIFICATIONS:**

**POWER INPUT:**

VOLTAGE: 12 / 24 VDC MODELS.  
 CURRENT: 150 mA MAXIMUM PLUS LOAD CURRENT.  
 10 AMP FUSE REQUIRED ON POWER INPUT.

**SIGNAL OUTPUT:**

ALARM SIGNAL RATED 10 AMP TOTAL NON-INDUCTIVE OR 5 AMP INDUCTIVE.


**PROTECTION:**

TRANSIENTS,  
 RF SIGNAL INTERFERENCE,  
 REVERSE POLARITY,  
 FUSE 10 AMP,  
 TEMPERATURE COMPENSATED.  
 VOLTAGE STABLE.

**OPERATING TEMPERATURE:**

-40°C / +85°C

P/N: 030-900      12 VOLTS  
 P/N: 030-900-1    24 VOLTS

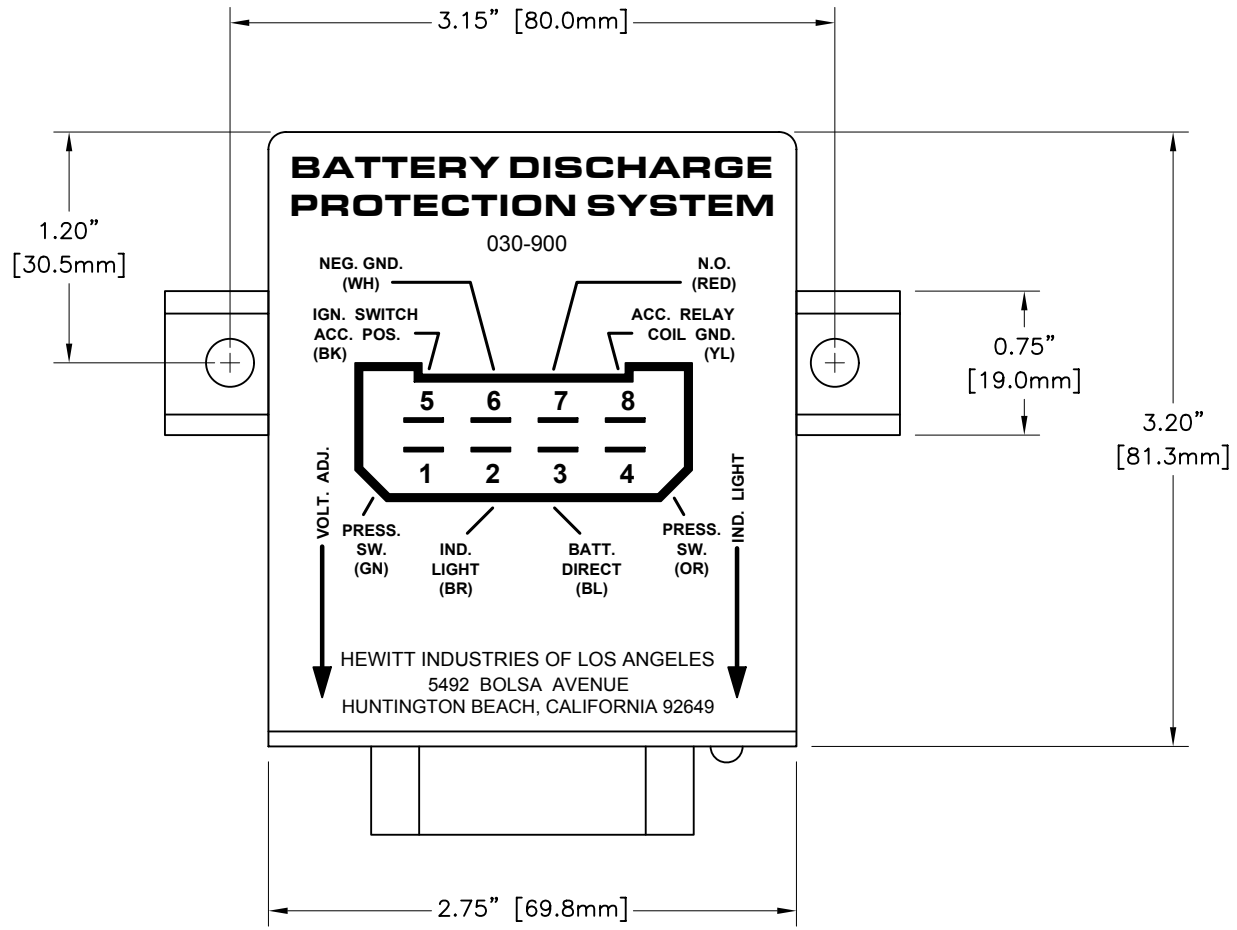


NOTES:

1. DIMENSIONS ARE FOR REFERENCE ONLY.

REVISIONS					TOLERANCES		HEWITT INDUSTRIES OF LOS ANGELES	
REV.	DESCRIPTION	EO#	DATE	BY	UNLESS OTHERWISE SPECIFIED:		TITLE: BATTERY DISCHARGE PROTECTION SYSTEM	
1	ENGINEERING RELEASE	-	09/16/13	JAG	DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS ARE IN [BRACKETS]:		DRAWN BY: J.GUERRERO KIT NO. 192-900	
					.X = .030 [0.76]		APPR. BY: M.TRAN	
					.XX = .010 [0.25]		DATE: 09/16/13	
					.XXX = .005 [0.13]		SHEET 1 OF 2	
					FRACTIONS = 1/32			
					ANGLES = ±1°			
					SCALE: 1/1			

1

PROTECT BOTH KEY SWITCH (ACCESSORY) AND CONSTANT POWER CIRCUITS

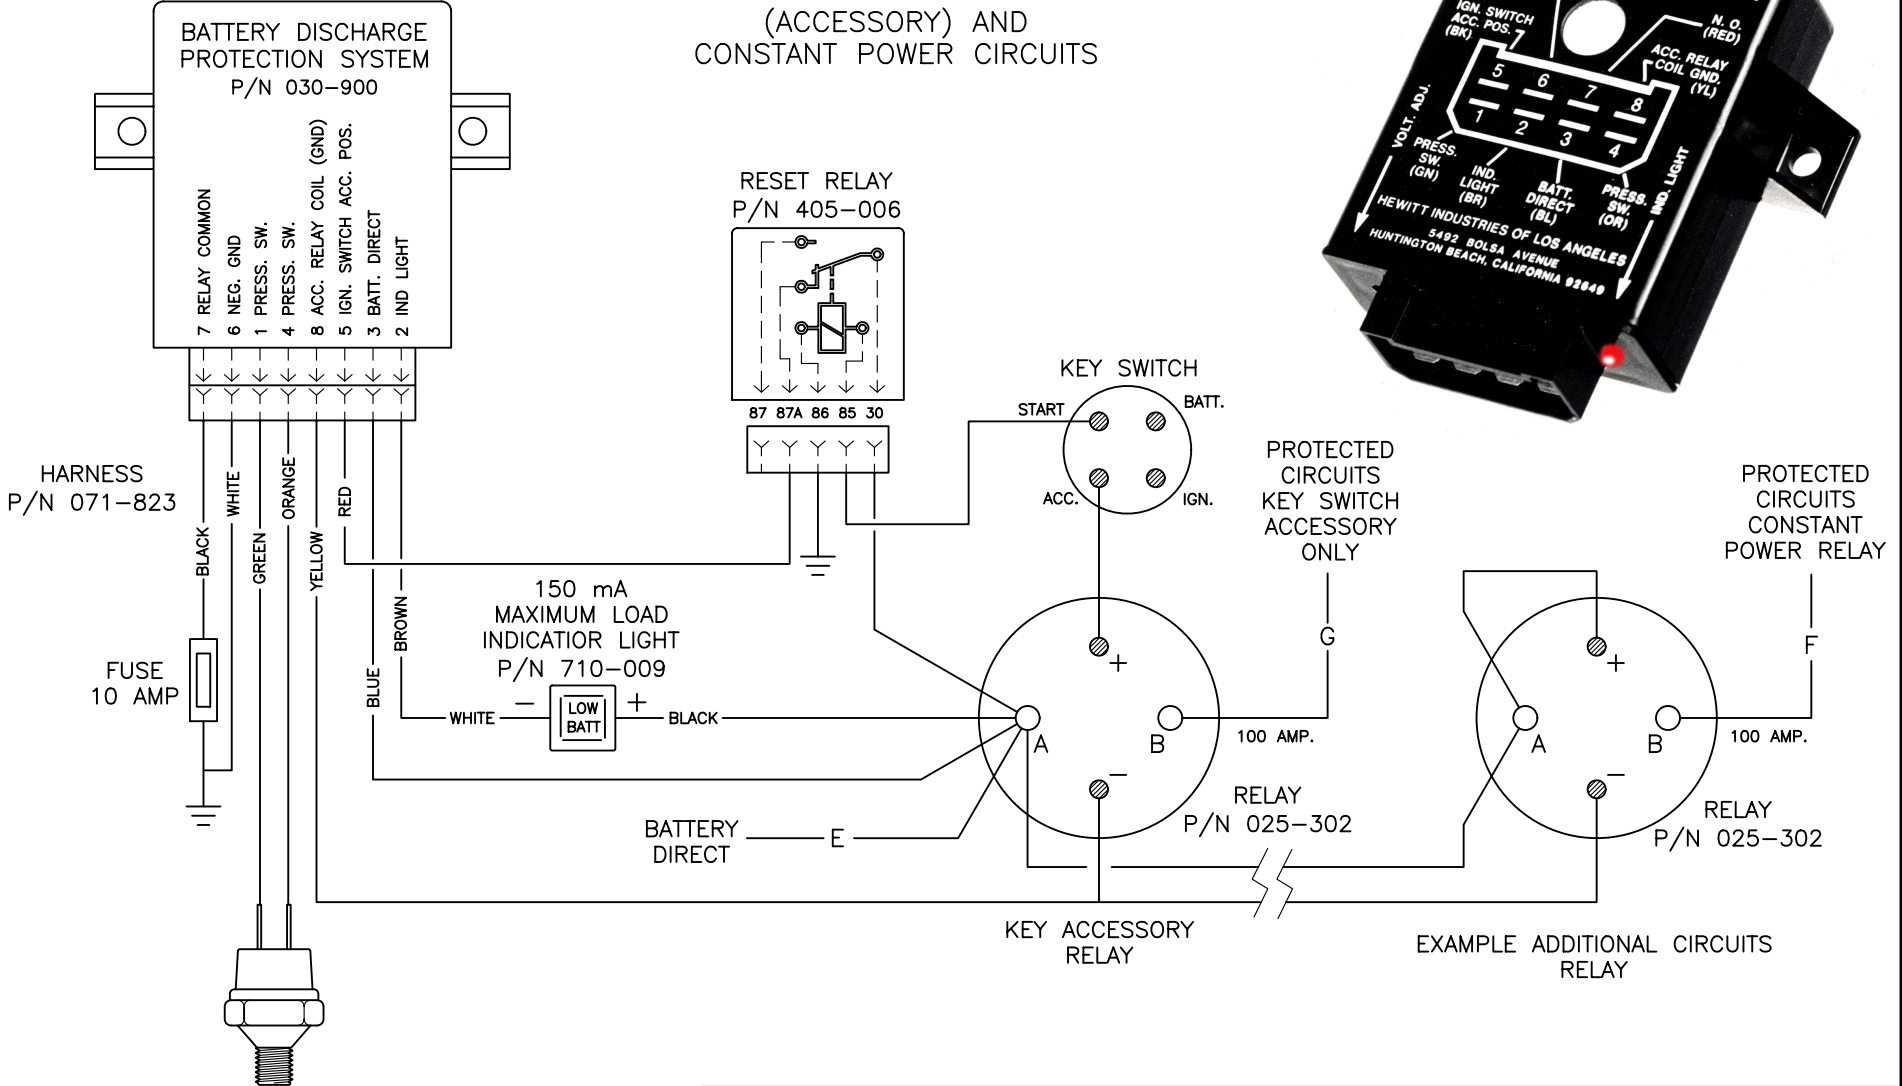

REVISIONS					TOLERANCES	
REV.	DESCRIPTION	EO#	DATE	BY	UNLESS OTHERWISE SPECIFIED:	
1	ENGINEERING RELEASE	-	09/16/13	JAG	DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS ARE IN [BRACKETS]:	
					.X = .030 [0.76]	
					.XX = .010 [0.25]	
					.XXX = .005 [0.13]	
					FRACTIONS = 1/32	
					ANGLES = ±1°	
					SCALE:	NONE

		<b>HEWITT INDUSTRIES OF LOS ANGELES</b>	
		TITLE: BATTERY DISCHARGE PROTECTION SYSTEM	
DRAWN BY: J.GUERRERO	KIT NO. 192-900		
APPR. BY: M.TRAN	DATE: 09/16/13	SHEET 2 OF 2	