

KIT NO. 192-935

SPECIFICATIONS:

POWER INPUT:

VOLTAGE: 12 / 24 VDC MODELS.
 CURRENT: 150 mA MAXIMUM PLUS LOAD CURRENT.
 10 AMP FUSE REQUIRED ON POWER INPUT.

SIGNAL OUTPUT:

ALARM SIGNAL RATED
 10 AMP TOTAL NON-INDUCTIVE OR 5 AMP INDUCTIVE.


PROTECTION:

TRANSIENTS,
 RF SIGNAL INTERFERENCE,
 REVERSE POLARITY,
 FUSE 10 AMP,
 TEMPERATURE COMPENSATED.
 VOLTAGE STABLE.

OPERATING TEMPERATURE:

-40°C / +85°C

P/N: 030-935 12 VOLTS
 P/N: 030-935-1 24 VOLTS

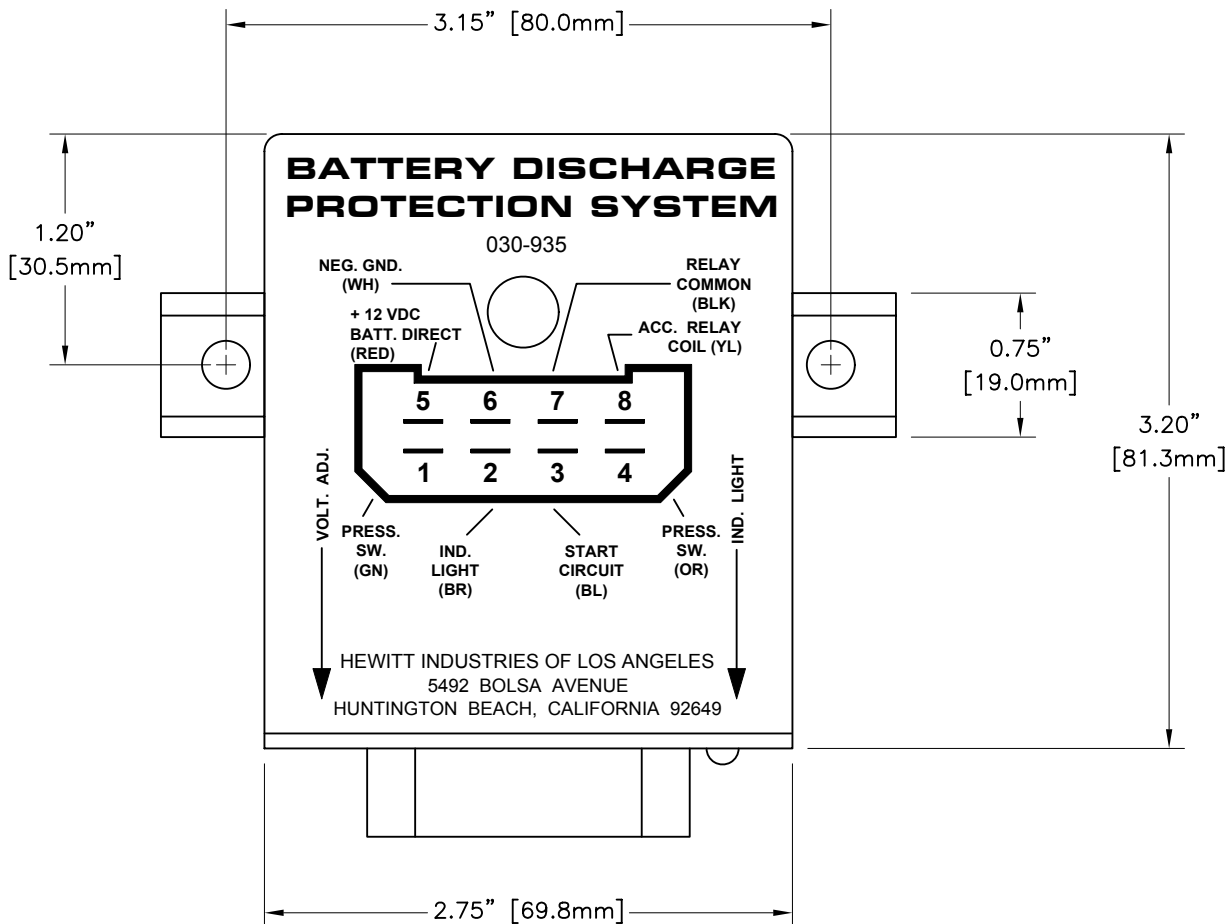


NOTES:

1. DIMENSIONS ARE FOR REFERENCE ONLY.

REVISIONS					TOLERANCES		HEWITT INDUSTRIES OF LOS ANGELES	
REV.	DESCRIPTION	EO#	DATE	BY	UNLESS OTHERWISE SPECIFIED:		TITLE:	
1	ENGINEERING RELEASE	-	04/07/11	JAG	DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS ARE IN [BRACKETS]:		BATTERY DISCHARGE PROTECTION SYSTEM	
A	RELEASE TO PRODUCTION PER ECO	ECO 644	10/08/13	JAG	.X = .030 [0.76] .XX = .010 [0.25] .XXX = .005 [0.13]		DRAWN BY: J.GUERRERO KIT NO. 192-935	
					FRACTIONS = 1/32		APPR. BY: D.WISHART	
					ANGLES = ±1°		DATE: 04/07/11	
					SCALE: 1/1		SHEET 1 OF 3	

A

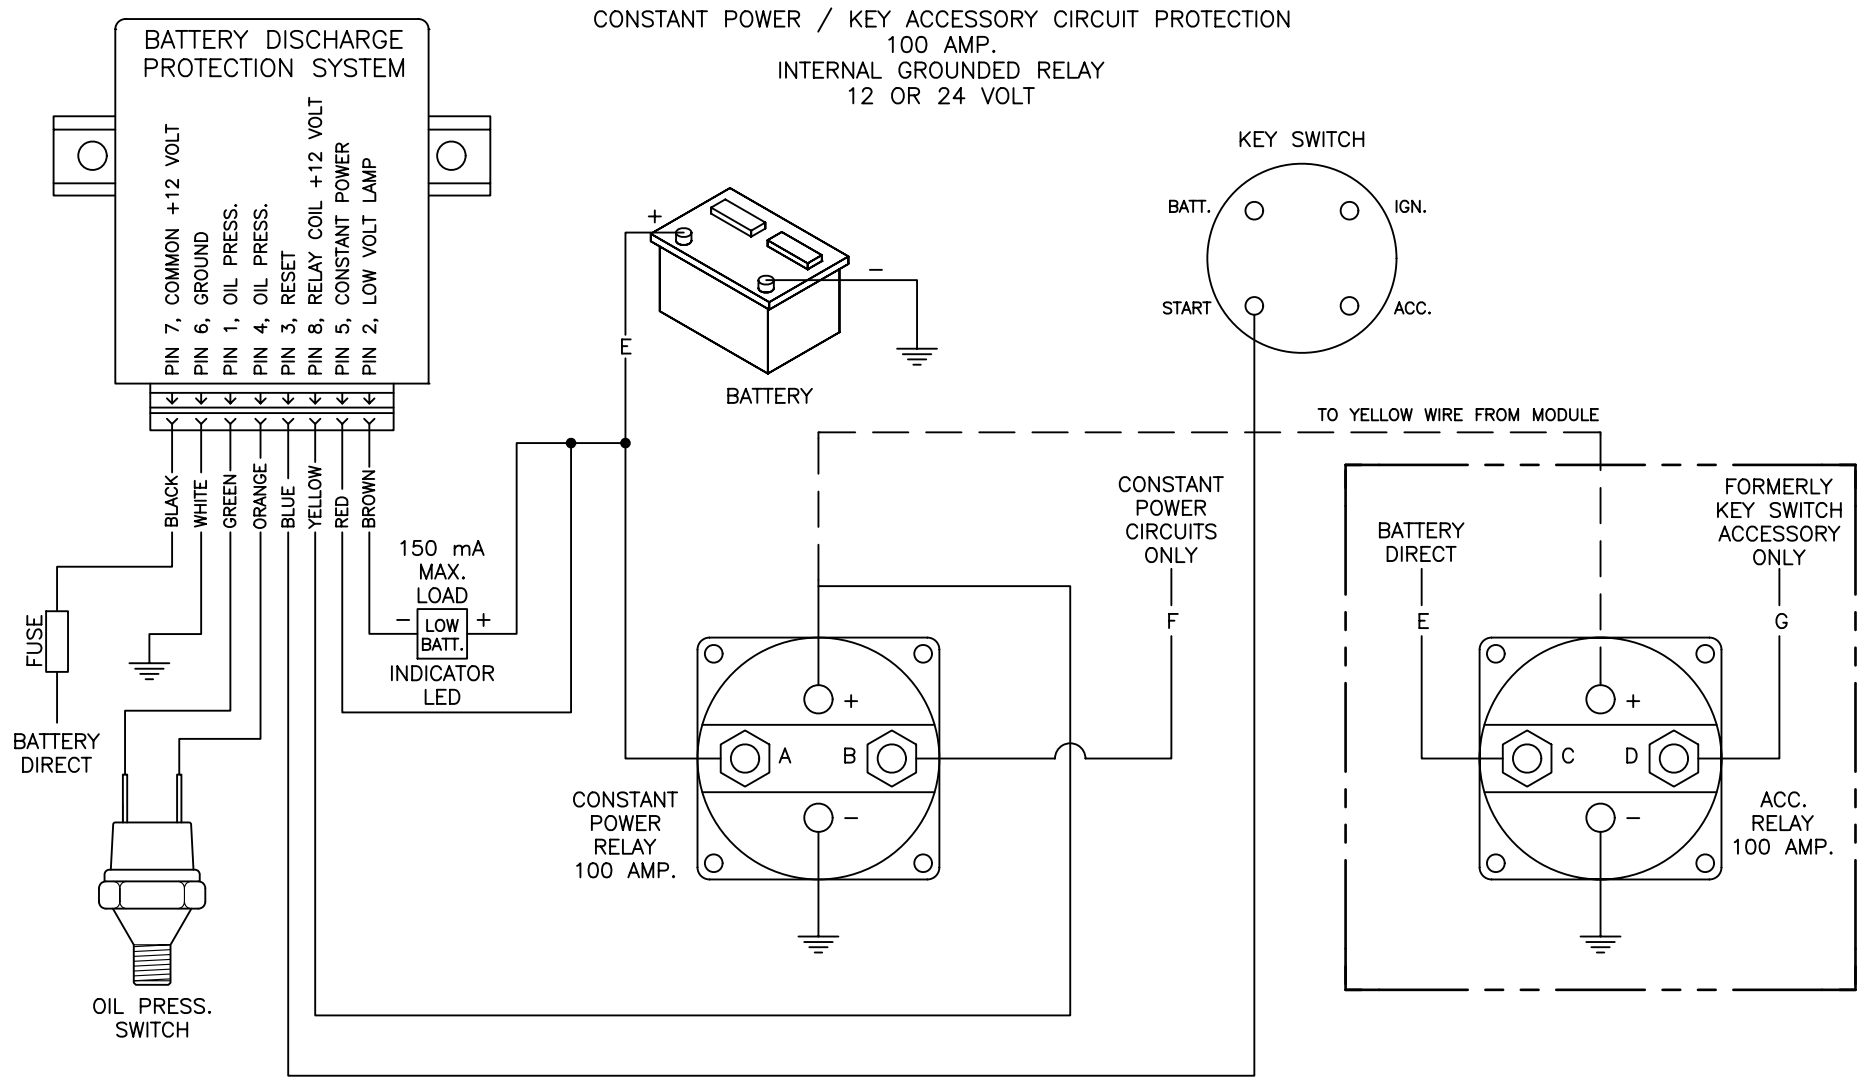

NOTES:

1. APPLICATION USING INTERNALLY GROUNDED RELAYS.
2. ALL CIRCUIT PROTECTION EXCEPT IGNITION.
3. AUTOMATIC SYSTEM RESET/TEST ON START CIRCUIT.

REVISIONS				
REV.	DESCRIPTION	EO#	DATE	BY
1	ENGINEERING RELEASE	-	04/07/11	JAG
A	RELEASE TO PRODUCTION PER ECO	ECO 644	10/08/13	JAG

TOLERANCES	
UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS ARE IN [BRACKETS]:	
.X	= .030 [0.76]
.XX	= .010 [0.25]
.XXX	= .005 [0.13]
FRACTIONS = 1/32	
ANGLES = ±1°	
SCALE:	NONE

HI HEWITT INDUSTRIES OF LOS ANGELES


TITLE: **BATTERY DISCHARGE PROTECTION SYSTEM**

DRAWN BY: J.GUERRERO KIT NO. 192-935

APPR. BY: DATE: 04/07/11 SHEET 2 OF 3

A

CONSTANT POWER / KEY ACCESSORY CIRCUIT PROTECTION
100 AMP.
EXTERNAL GROUNDING RELAY
12 OR 24 VOLT

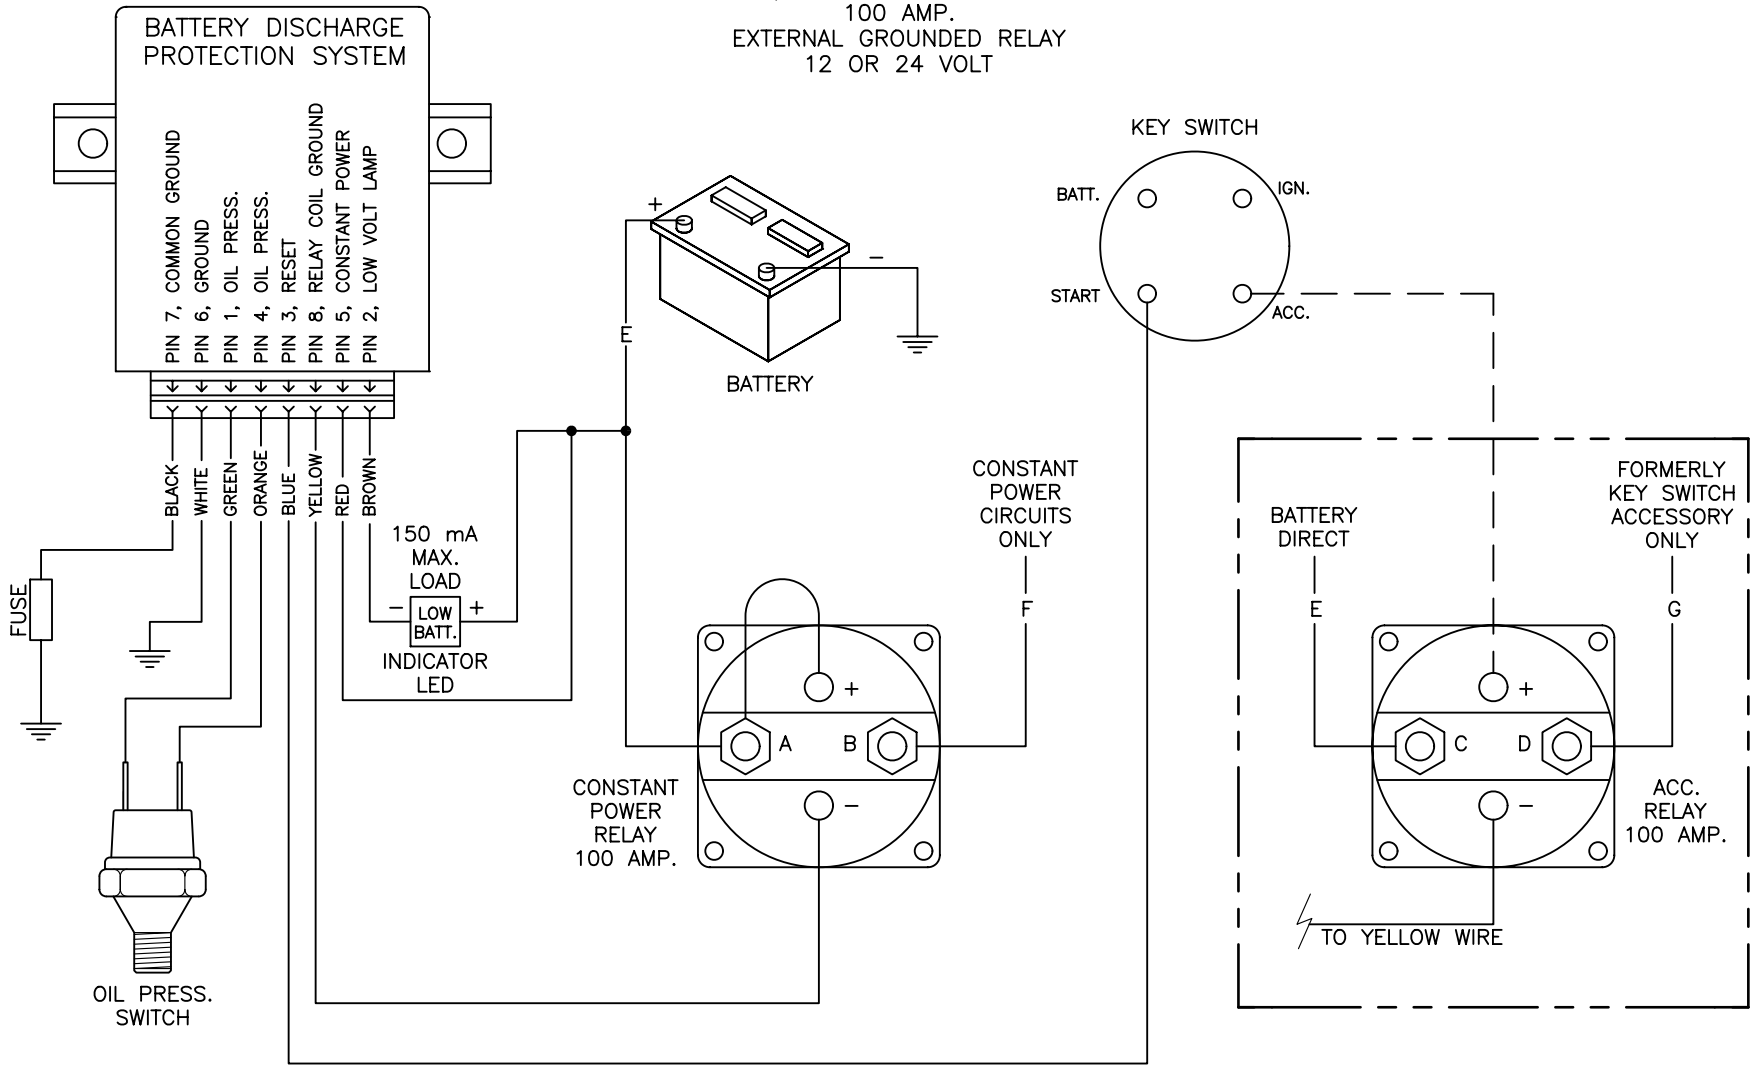

NOTES:

1. APPLICATION USING EXTERNALLY GROUNDING RELAYS.
2. ALL CIRCUIT PROTECTION EXCEPT IGNITION.
3. AUTOMATIC SYSTEM RESET/TEST ON START CIRCUIT.

REVISIONS				
REV.	DESCRIPTION	EO#	DATE	BY
1	ENGINEERING RELEASE	-	04/07/11	JAG
A	RELEASE TO PRODUCTION PER ECO	ECO 644	10/08/13	JAG

TOLERANCES	
UNLESS OTHERWISE SPECIFIED:	
.X	= .030 [0.76]
.XX	= .010 [0.25]
.XXX	= .005 [0.13]
FRACTIONS = 1/32	
ANGLES = ±1°	
SCALE:	NONE

HI HEWITT INDUSTRIES OF LOS ANGELES

TITLE: BATTERY DISCHARGE PROTECTION SYSTEM

DRAWN BY: J.GUERRERO KIT NO. 192-935

APPR. BY: DATE: 04/07/11 SHEET 3 OF 3

A