

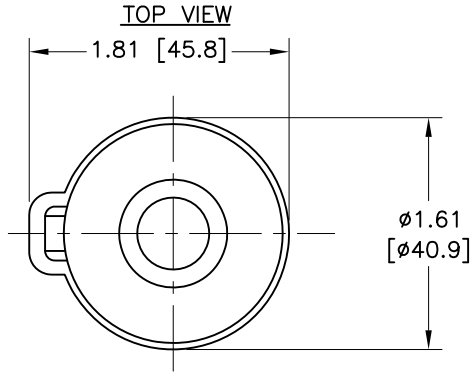


TABULATION BLOCK			
PART NO.	DRIVE SIZE	"T" THREAD SIZE	TANG P/N
023-004-A	0.104" SQUARE	7/8-18	760-260
023-004-B	0.150" SQUARE	7/8-18	760-261
023-004-C	0.187" SQUARE	7/8-18	760-262
023-004-D	0.152" ROUND	7/8-18	760-263
023-004-E	0.187" ROUND	7/8-18	760-264
023-004-F	0.203" ROUND	7/8-18	760-265
023-004-G	DIN	22mm X 1.5	-
023-004-H	0.187" ROUND	22mm X 1.5	760-264

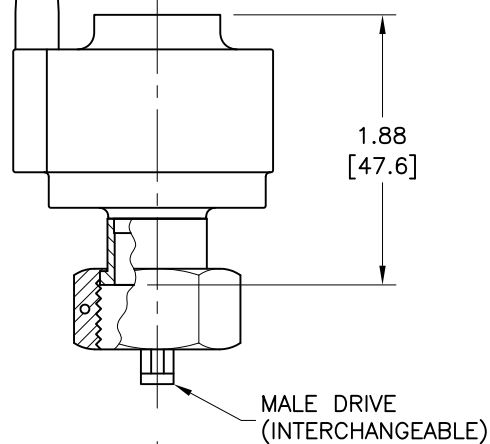


10" [254mm] LONG  
8" [203mm] LONG

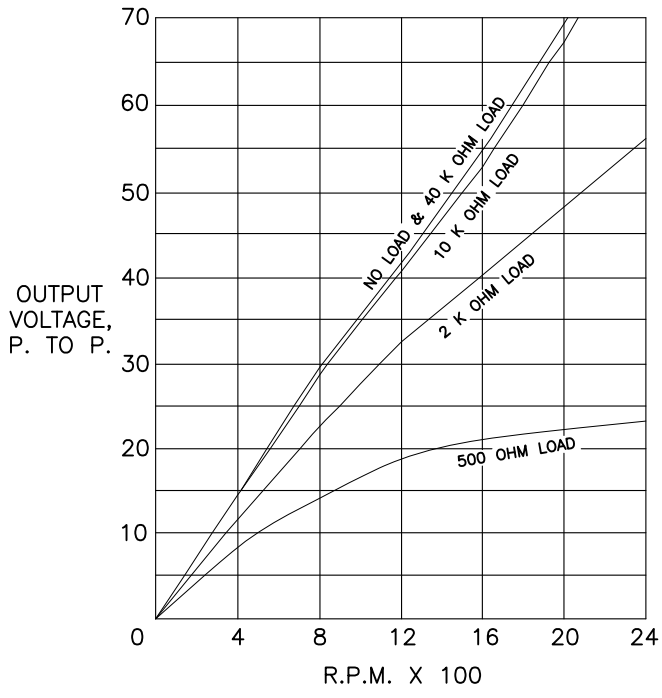

**SPECIFICATIONS:**

1. FREQUENCY: 8 PULSES PER REVOLUTION.
2. DC SOURCE IMPEDANCE: 285 OHMS ±10 OHMS.
3. INDUCTANCE: 107mH AT 1000Hz.
4. HOUSING MATERIAL: GLASS FILLED NYLON.
5. BEARING: DOUBLE-OILITE.
6. LEAD WIRES: 18 AWG., 16/19 STRANDED.

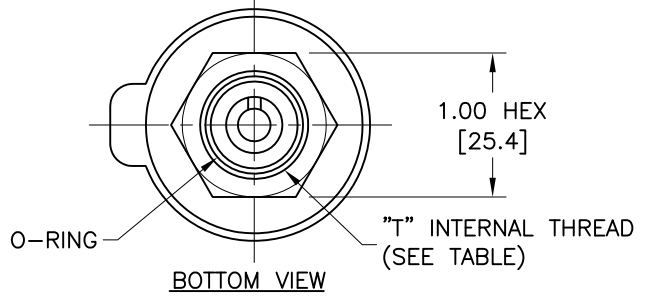

**NOTES:**

1. DUAL OUTPUT GENERATOR ALSO AVAILABLE.
2. SPECIAL LENGTHS AND CONNECTORS AVAILABLE.
3. AVAILABLE IN DIN, M22 X 1.5 METRIC THREAD.
4. NO POLARITY ON LEAD WIRES. ONE LEAD WIRE TO SIGNAL, THE OTHER LEAD WIRE TO GROUND.

B

REVISIONS					TOLERANCES		HEWITT INDUSTRIES OF LOS ANGELES	
REV.	DESCRIPTION	EO#	DATE	BY	UNLESS OTHERWISE SPECIFIED:		TITLE:	
1	ENGINEERING RELEASE	-	08/29/11	JAG	DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS ARE IN [BRACKETS]:		SIGNAL GENERATOR	
A	PRODUCTION RELEASE	-	09/13/12	JAG	.X = .030 [0.76]		DRAWN BY: J.GUERRERO PART NO. 023-004-X	
B	REVISED PER ECO	ECO 740	04/11/17	JAG	.XX = .010 [0.25]		APPR. BY: J.HEWITT	
					.XXX = .005 [0.13]		DATE: 08/29/11	
					FRACTIONS = 1/32		SHEET 1 OF 1	
					ANGLES = ±1°			
					SCALE: 3/4			