
NO.
020
0—(
04-
\times

FOR CUSTOMERS DRAWING 020)-004-X	С			
PART NO.	THREAD "A"	DIM "B"	DIM "C"	DIA "D"	
020-004	1/4" NPT	1.25 [31.8]	2.50 [63.5]	0.187 [4.75]	
020-004-1	1/4" NPT	2.25 [57.2]	3.50 [88.9]	0.187 [4.75]	
020-004-2	1/8" NPT	1.30 [33.0]	2.50 [63.5]	0.187 [4.75]	
020-004-3	1/8" NPT	0.90 [22.9]	2.10 [53.3]	0.187 [4.75]	
020-004-4	1/4" NPT	1.91 [48.5]	3.15 [88.0]	0.187 [4.75]	

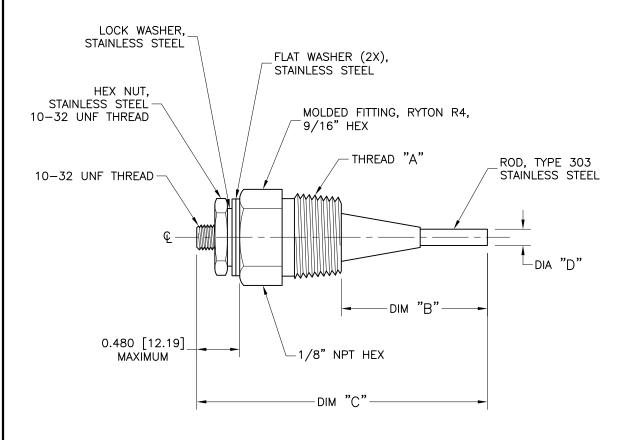

NOTES:

 MAXIMUM TORQUE: 10ft/lbs.
MATERIAL: BLACK RYTON R4 ON STAINLESS STEEL, TYPE 303. This document involves CONFIDENTIAL proprietary design rights of HEWITT IND. and all designs, manufacturing, reproduction, use and sale rights regarding same are expressly reserved. It is submitted under a confidential relationship and the recipient agrees to assume custody and control thereof and that proprietary information contained herein shall not be reproduced or transferred to other documents or disclosed to others or used for manufacturing or any other purpose without prior written permission of HEWITT IND.

	REVISIONS				TOLERANCES	HI HEWITT INDUSTRIES	
	REV.	DESCRIPTION	EO#	DATE	BY	UNLESS OTHERWISE SPECIFIED:	OF LOS ANGELES
						DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS ARE IN	TITLE: COOLANT LEVEL
					BRACKETS]:	[BRACKETS]:	COOLANT LEVEL
						.X = .030 [0.76] .XX = .010 [0.25]	PROBE ASSEMBLY
						.xx = .010 [0.25]	DRAWN BY: JAG PART No. 020-004-X
_						.X = .030 [0.76] .XX = .010 [0.25] .XXX = .005 [0.13] FRACTIONS = 1/32	APPR. BY: NO. UZU-UU4-X
ΔΙ						ANGLES = II	CUEET 4 OF 4
/ \						SCALE: NONE	DATE: 06/03/11 SHEET 1 OF 1