


PART NO. 024-630

DUAL MAGNETIC SENSOR  
(1000 OHMS)

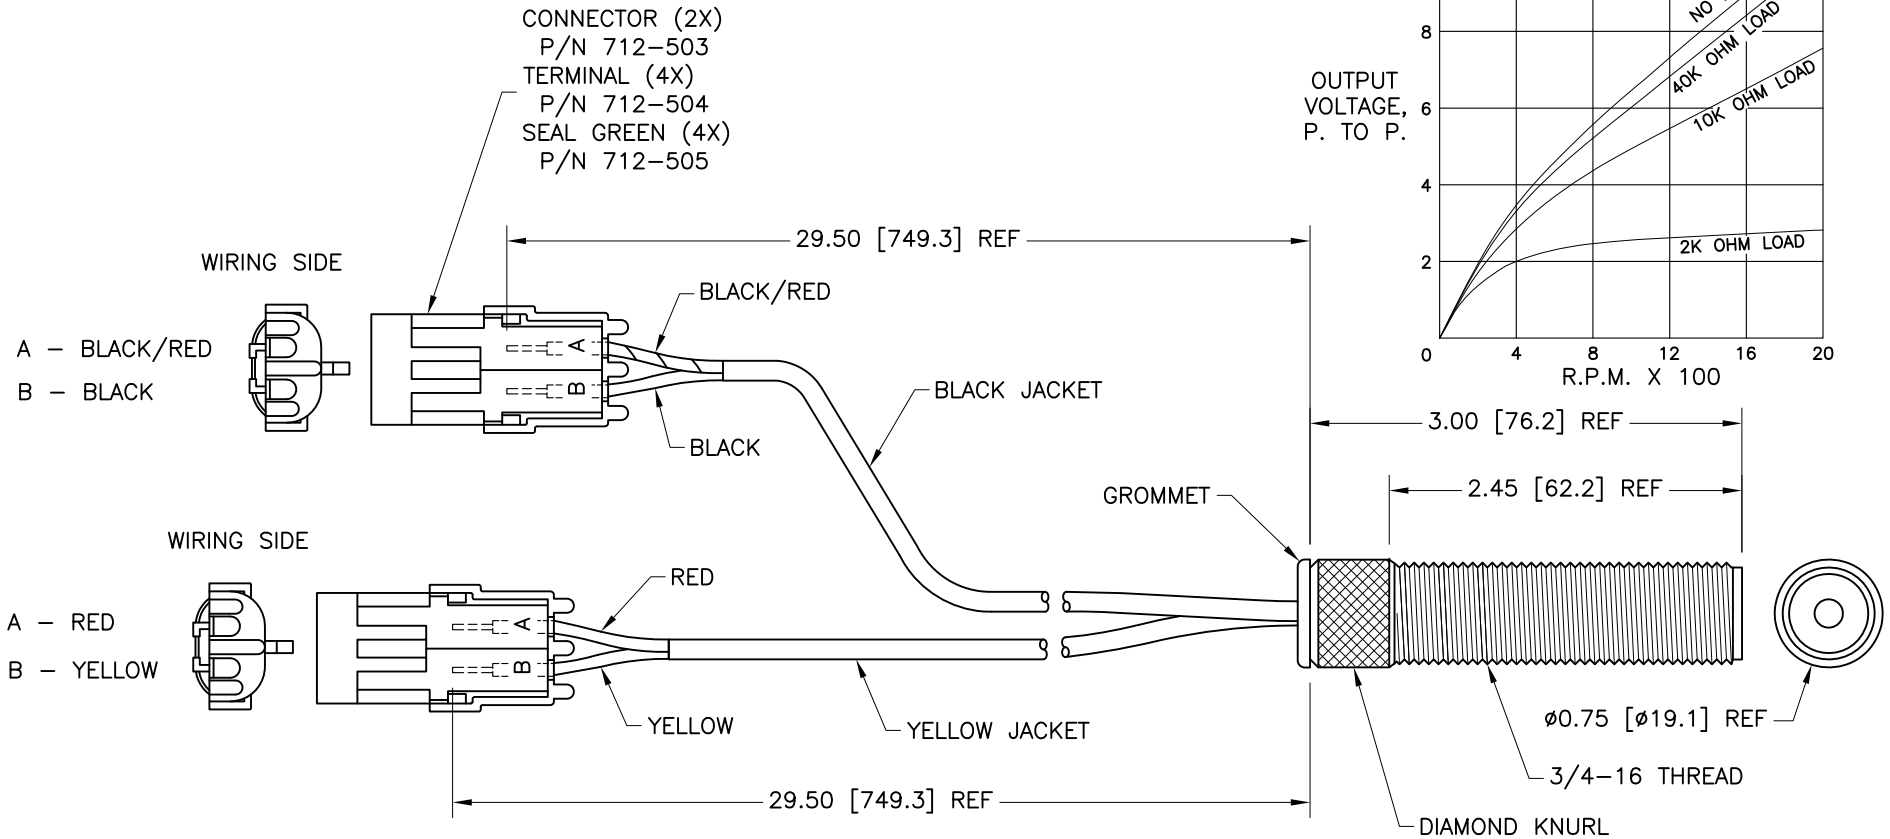

NOTES:

1. HOUSING MATERIAL: T304 STAINLESS STEEL.
2. RECOMMENDED GAP: 0.050" (3/4 TURN).
3. MAX. INSTALLATION TORQUE: 30FT-LBS.
4. HARDWARE: HEX NUT AND WASHER IN SEPARATE PACK.
5. REFERENCE: NAVISTAR P/N 1612781C91.

NAVISTAR

REVISIONS					TOLERANCES	
REV.	DESCRIPTION	EO#	DATE	BY	UNLESS OTHERWISE SPECIFIED:	
A	REVISED PER ECO #	ECO 403	03/21/08	EGM	DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS ARE IN [BRACKETS]:	
B	REVISED PER ECO #	ECO 610	09/11/12	JAG	.X = .030 [0.76] .XX = .010 [0.25] .XXX = .005 [0.13]	
					FRACTIONS = 1/32 ANGLES = ±1°	
					SCALE:	3/4

		<b>HEWITT INDUSTRIES OF LOS ANGELES</b>	
TITLE: DUAL MAGNETIC SENSOR			
DRAWN BY: E. MARIANO		PART NO. 024-630	
APPR. BY: D. WISHART		DATE: 03/21/08	
		SHEET 1 OF 1	