


**SPECIFICATIONS:**

**POWER INPUT:**  
 VOLTAGE: 12 VDC & 24 VDC MODELS  
 CURRENT: 250 mA MAXIMUM PLUS  
 LOAD CURRENT.

**SIGNAL OUTPUT:**  
 ALARM SIGNAL RATED AT 8 AMPS  
 TOTAL NONINDUCTIVE OR 4 AMPS  
 INDUCTIVE.

**PROTECTION:**  
 TEMPERATURE COMPENSATED.  
 VOLTAGE STABLE.  
 TRANSIENT PLUS REVERSE POLARITY  
 PROTECTION.  
 7.5 AMPS FUSE REQUIRED.

**PARK BRAKE SWITCH**

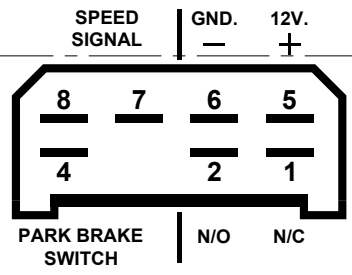

**P/N 030-906**

HEWITT INDUSTRIES OF LOS ANGELES  
 5492 BOLSA AVENUE  
 HUNTINGTON BEACH, CALIFORNIA 92649


**NOTES:**

- PART NUMBER DETERMINED BY APPLICATION:  
 030-906: NEGATIVE GROUND 12 VOLT.  
 030-906-1: NEGATIVE GROUND 24 VOLT.

A

REVISIONS					TOLERANCES		HEWITT INDUSTRIES OF LOS ANGELES	
REV.	DESCRIPTION	EO#	DATE	BY	UNLESS OTHERWISE SPECIFIED:		TITLE:	
-	ENGINEERING RELEASE	-	09/03/96	TM	DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS ARE IN [BRACKETS]: .X = .050 [1.27] .XX = .030 [0.76] .XXX = .010 [0.25] FRACTIONS = 1/32 ANGLES = ±1° SCALE: 1/1		MODULE, PARK BRAKE SWITCH	
A	REDRAWN IN CAD & RELEASED PER ECO	ECO 698	07/07/15	JAG			DRAWN BY: J.GUERRERO PART NO. 030-906-0	
							APPR. BY: L.MAGANA	
							DATE: 07/07/15 SHEET 1 OF 2	

PART NO. 030-906-0

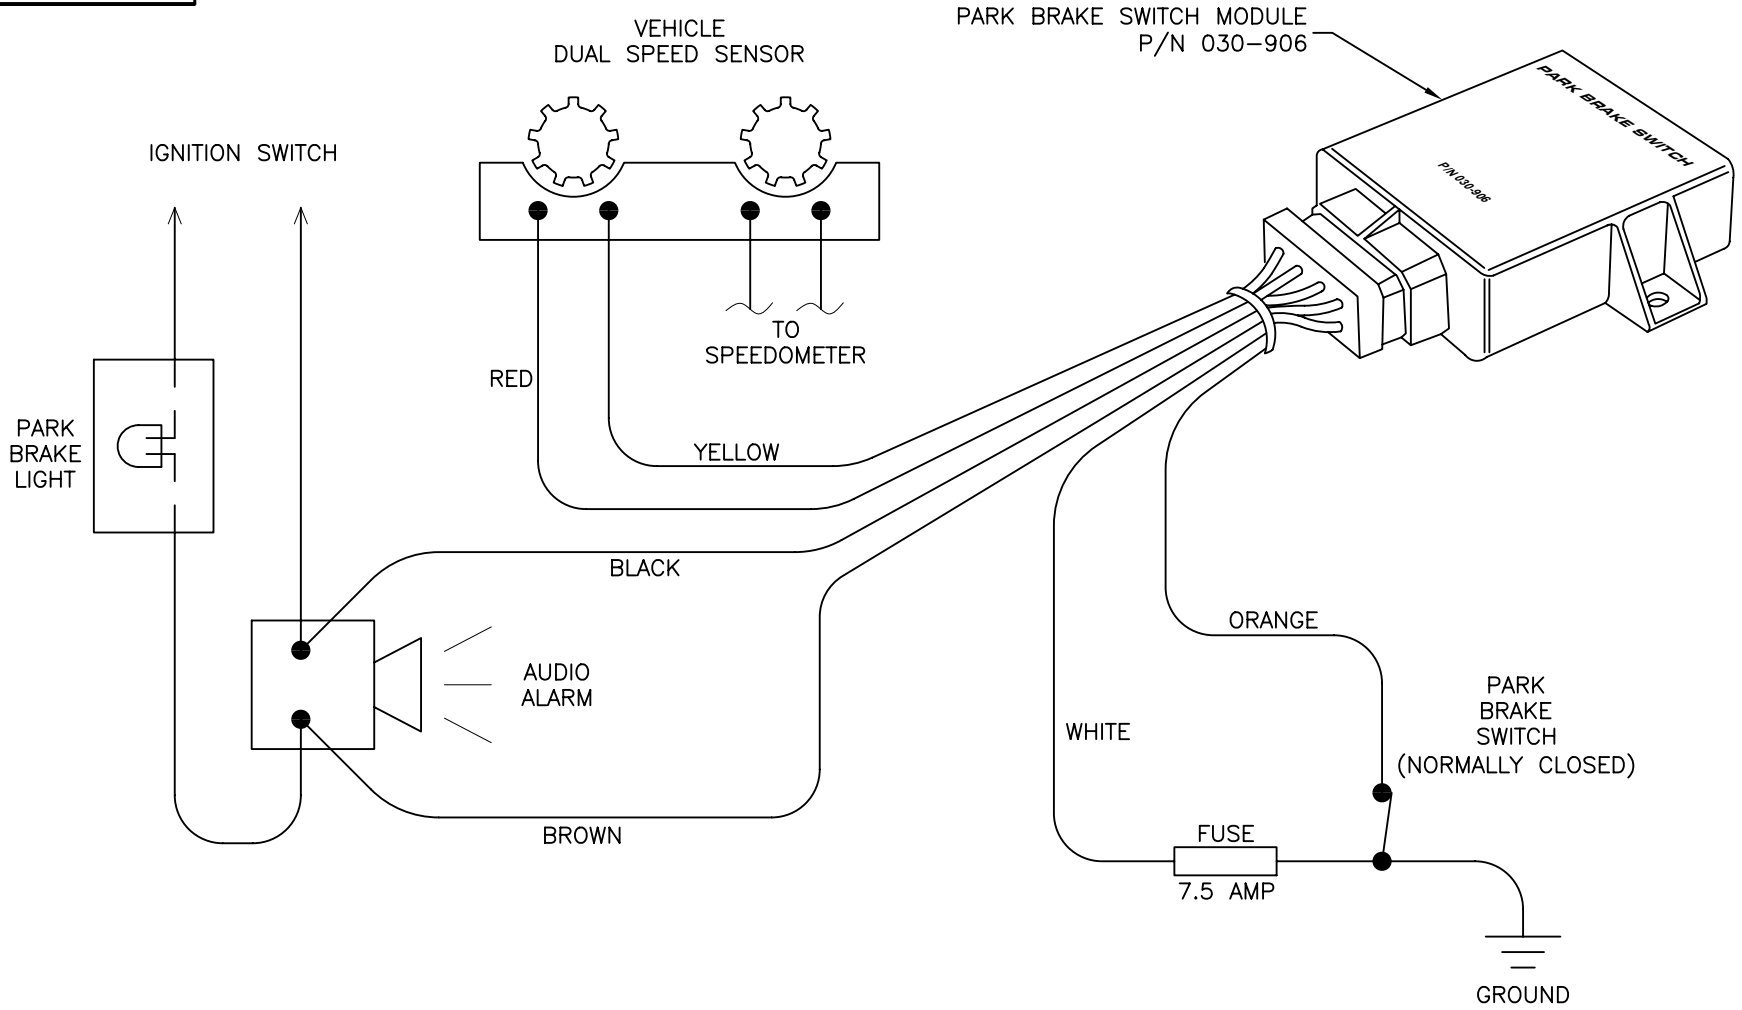

**NOTES:**

- PART NUMBER DETERMINED BY APPLICATION:  
 030-906: NEGATIVE GROUND 12 VOLT.  
 030-906-1: NEGATIVE GROUND 24 VOLT.

REVISIONS					TOLERANCES	
REV.	DESCRIPTION	EC#	DATE	BY	UNLESS OTHERWISE SPECIFIED:	
-	ENGINEERING RELEASE	-	09/03/96	TM	DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS ARE IN [BRACKETS]:	
A	REDRAWN IN CAD & RELEASED PER ECO	ECO 698	07/07/15	JAG	.X = .050 [1.27] .XX = .030 [0.76] .XXX = .010 [0.25] FRACTIONS = 1/32 ANGLES = ±1°	
SCALE: NONE					SCALE: NONE	

		<b>HEWITT INDUSTRIES OF LOS ANGELES</b>	
		TITLE: MODULE, PARK BRAKE SWITCH	
DRAWN BY: J.GUERRERO	PART NO. 030-906-0	APPR. BY: L.MAGANA	SHEET 2 OF 2
DATE: 07/07/15			